

EROSION CONTROL LEGEND

ESCP BMP	LINE TYPE/SYMBOL	REFERENCE
CONSTRUCTION EXIT PAD		SHEET C06.3
TOPSOILING		NOT APPLICABLE
CHEMICAL STABILIZATION		NOT APPLICABLE
DUST CONTROL		SHEET C06.5
EROSION CONTROL BLANKET		NOT APPLICABLE
MULCHING		SHEET C06.5
PERMANENT SEEDING		NOT APPLICABLE
SODDING		SHEET C06.5
TEMPORARY SEEDING		SHEET C06.5
CHECK DAM		NOT APPLICABLE
GRASS SWALE		NOT APPLICABLE
DIVERSION		NOT APPLICABLE
INLET PROTECTION		SHEET C06.6
SEDIMENT BARRIER		SHEET C06.6
TEMPORARY SEDIMENT TRAP		NOT APPLICABLE
ROCK FILTER DAM		NOT APPLICABLE

SEE EXISTING CONDITIONS SURVEY AND LANDSCAPE TREE PROTECTION PLANS FOR LEGENDS

GENERAL CBMPP NOTES

GENERAL

1. EROSION CONTROL MEASURES SHALL BE MAINTAINED AT ALL TIMES. IF FULL IMPLEMENTATION OF THE APPROVED PLAN DOES NOT PROVIDE FOR EFFECTIVE EROSION CONTROL, ADDITIONAL EROSION CONTROL MEASURES AND PRACTICES SHALL BE IMPLEMENTED TO CONTROL OR TREAT THE SEDIMENT SOURCE AT THE EXPENSE OF THE CONTRACTOR.
2. SEE GRADING & DRAINAGE NOTES.

SLOPES AND DISTURBED AREA STABILIZATION

1. CONCENTRATED FLOW AREAS AND ALL SLOPES 2H:1V OR STEEPER SHALL BE STABILIZED WITH THE APPROPRIATE EROSION CONTROL MATTING OR BLANKET.
2. ALL CUT AND FILL SLOPES MUST BE SURFACE ROUGHENED AND VEGETATED WITHIN (7) DAYS OF THEIR CONSTRUCTION.
3. ALL DISTURBED AREAS SHALL BE GRASSED AS SOON AS CONSTRUCTION PHASES PERMIT. NO EXPOSED GRADE WILL BE LEFT UNSTABILIZED FOR MORE THAN 7 DAYS.
4. PERMANENT GRASSING AND LANDSCAPING OF DISTURBED AREAS SHALL BE COMPLETED AS QUICKLY AS POSSIBLE. TEMPORARY STABILIZATION BY MULCHING AND/OR TEMPORARY SEEDING WILL BE REQUIRED IN THE EVENT OF PROJECT DELAYS.
5. TYPE 'X' SEDIMENT BARRIERS SHALL BE PLACED AT THE TOE OF ALL FILL SLOPES.

DRAINAGE

1. ALL DRAINAGE STRUCTURES SHALL BE EROSION PROOFED.

TREE PROTECTION

1. ALL TREE SAVE AREAS SHALL BE CLEARLY IDENTIFIED WITH FLAGGING AND/OR FENCING PRIOR TO COMMENCEMENT OF ANY LAND DISTURBANCE.
2. ALL TREE PROTECTION DEVICES SHALL BE INSTALLED PRIOR TO START OF LAND DISTURBANCE AND MAINTAINED UNTIL FINAL LANDSCAPING IS INSTALLED.
3. NO PARKING, STORAGE, OR OTHER CONSTRUCTION SITE ACTIVITIES ARE TO OCCUR WITHIN TREE PROTECTION AREAS.

MAINTENANCE AND INSPECTIONS

1. SEDIMENT AND EROSION CONTROL MEASURES AND PRACTICES SHALL BE INSPECTED DAILY.
2. SEDIMENT STORAGE MAINTENANCE INDICATORS MUST BE INSTALLED IN SEDIMENT STORAGE STRUCTURES, INDICATING THE 10 FULL VOLUME.
3. SEDIMENT CONTROL DEVICES MUST BE INSPECTED DAILY AND CHECKED AFTER EACH STORM EVENT AND CLEANED OR REPLACED WHEN THEY REACH 10% OF DESIGN CAPACITY.
4. ALL TREE PROTECTION FENCING TO BE INSPECTED DAILY AND REPLACED OR REPAIRED AS NEEDED.
5. MAINTENANCE OF ALL SOIL AND SEDIMENTATION CONTROL MEASURES AND PRACTICES, WHETHER TEMPORARY OR PERMANENT, SHALL BE AT ALL TIMES THE RESPONSIBILITY OF THE CONTRACTOR.

REMOVAL OF SEDIMENT TOPSOILING

CONTRACTOR SHALL STRIP AND STOCKPILE TOPSOIL FOR USE TO SPREAD OVER SITE AS NEEDED. ANY TOPSOIL STOCKPILE SHALL BE ENTIRELY SURROUNDED BY SEDIMENT BARRIER, FURTHERMORE ANY TOPSOIL EXPOSED FOR MORE THAN 13 DAYS SHALL BE SEEDED.

ANY TOPSOIL NOT USED, AS WELL AS ALL SEDIMENT FROM BMP DEVICES WITHIN THE SCOPE OF WORK, SHALL BE HAULED OFF TO APPROVED LOCATION. CONTRACTOR SHALL ENSURE THAT ALL PERMITS ASSOCIATED WITH THE HAUL OFF HAVE BEEN OBTAINED FROM THE CITY OF OPELIKA, OR ANY ENTITY HAVING JURISDICTION.

IN THE EVENT THAT SEDIMENT EXISTS ON SITE AND SAID SEDIMENT IS CONVEYED TO MOORE'S MILL CREEK, DOWNSTREAM, CONSTRUCTION SHALL STOP, AND THE CONTRACTOR SHALL NOTIFY ADEM IMMEDIATELY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING THE SEDIMENT FROM THE AFOREMENTIONED CREEK. FURTHERMORE, THE CONTRACTOR SHALL PROCESS THIS SEDIMENT IN THE SAME MANNER AS THE EXCESS TOPSOIL OR THE SEDIMENT REMOVED FROM THE ON-SITE BMPs.

PHASE III EROSION PREVENTION NARRATIVE

PHASE III, PHASE III CONSISTS OF MAINLY PAVING AS PART OF THE LAND DISTURBING ACTIVITIES. EROSION WILL BE PREVENTED DURING PHASE THREE VIA THE FOLLOWING MEANS AND METHODS:

INLETS SHALL CONTINUE TO BE PROTECTED; HOWEVER, THE SILT SAVERS SHALL BE REPLACED AT THIS POINT WITH "DANDY CURB SACKS" FOR ALL CURB INLETS IN QUESTION AND A "DANDY BAG" FOR ALL GRATE INLETS. THIS WILL ENSURE THAT ANY RANDOM SEDIMENT TRAVERSING A PAVED AREA WILL NOT ENTER THE EXISTING STORM SYSTEM.

NOTE THAT THE TEMPORARY SEDIMENT TRAPS CAN BE REMOVED ONCE AREAS NOT BEING DISTURBED ARE PROPERLY STABILIZED IN THEIR FINAL CONDITION.

PERMANENT SEEDING AND/OR SOD WILL BE APPLIED, ALONGSIDE OTHER LANDSCAPING, IN PEROUS AREAS TO FULLY STABILIZE THOSE AREAS AND PREVENT EROSION.

ALTHOUGH NO DUST IS EXPECTED TO SPREAD IN PHASE III DUE TO PAVING, THE CONTRACTOR SHALL MAINTAIN THE DUST CONTROL MEASURES MENTIONED IN THE PHASE II EROSION PREVENTION NARRATIVE WHEREVER POSSIBLE IN ORDER TO PREVENT ANY DUST FROM SPREADING.

24-HOUR CONTACT:
JOE CELENTO
(912) 272-4811

CONTRACTOR SHALL REPLACE ALL TREES/SHRUBS FROM DEMOLITION ADJACENT TO BUILDING AND IF DEMOLITION CAUSES OTHER PLAN MATERIAL TO DIE.

CONTRACTOR SHALL FIELD VERIFY ALL EXISTING UTILITIES (LOCATIONS AND ELEVATIONS) PRIOR TO STARTING CONSTRUCTION AND ALERT ENGINEER TO ANY DISCREPANCIES IMMEDIATELY.



PANDA EXPRESS, INC.
1683 Walnut Grove Ave.
Rosemead, California
91770
Telephone: 626.799.9898
Facsimile: 626.372.8288

All ideas, designs, arrangement and plans indicated or represented by this drawing are the property of Panda Express Inc. and were created for use on this specific project. None of these ideas, designs, arrangements or plans may be used by or disclosed to any person, firm, or corporation without the written permission of Panda Express Inc.


REVISIONS:

ISSUE DATE:

PLAN CHECK	07/26/19
PERMIT	09/09/19
ADEM	11/04/19
BID	11/07/19
CONSTRUCTION	XX-XX-XX

DRAWN BY:

PANDA PROJECT #: D7163
PANDA STORE #: XXXX
IE PROJECT #: 190036

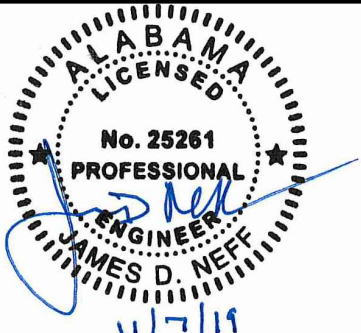

PANDA EXPRESS
TRUE WARM & WELCOME 2300
2096 INTERSTATE DRIVE
OPELIKA, AL 36801

CBMPP PLAN
PHASE III &
STABILIZATION PLAN
C06.4